


ZX10 FULLY RUGGED TABLET



- Processeur 8 cœurs Qualcomm® Snapdragon™ 660
- Écran tactile capacitif LumiBond de 10.1" compatible avec le port de gants et avec la technologie de lecture en plein soleil Getac
- Deux batteries remplaçables à chaud pour un fonctionnement ininterrompu
- Certification MIL-STD-810H et IP66, avec résistance aux chutes de 1,8 m (6 pi)
- Lecteur de code-barres et RFID (en option)
- Vérifié comme Android entreprise recommended ^{vi}

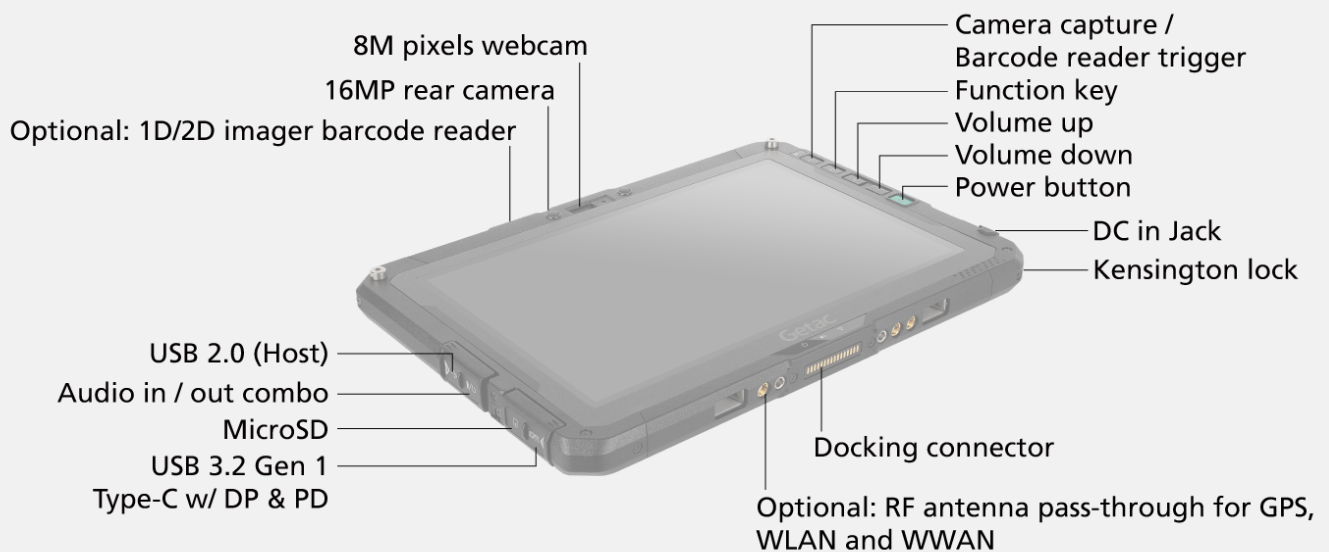

SPECIFICATIONS

Generation

G1

Operating System

Android™ 12.0

Mobile Computing Platform

Qualcomm® Snapdragon™ 660, Octa-core
1.95GHz Max. 2.2GHz

VGA Controller

Qualcomm® Adreno™ 512 GPU

Display

10.1" TFT LCD WUXGA (1920 x 1200)

Protection film

800 nits LumiBond display with Getac sunlight readable technology

Capacitive multi-touch screen

Storage & Memory

4GB LPDDR4, 64GB eMMC

Optional: 6GB LPDDR4, 128GB eMMC

Device Button

Power button

4 tablet programmable buttons

Pointing Device

Touchscreen

- Capacitive multi-touch screen

- Optional: Dual mode touchscreen (multi-touch and digitizer)

Expansion Slot

Optional: 1D/2D imager barcode reader

Optional: Smart card reader

Optional: HF RFID/NFC combo readerⁱ

I/O Interface

8M pixels webcam x 1

16M pixels auto focus rear camera x 1

Audio in/out combo x 1

DC in Jack x 1

USB 3.2 Gen 1 Type-C w/ DP & PD x 1

USB 2.0 (Host) x 1

MicroSD x 1

Docking connector x 1

Optional: SIM card slot x 2 (Micro-SIM, 3FF)^{vii}

Optional: RF antenna pass-through for GPS and WWAN

Communication Interface

Wi-Fi 802.11ac

Bluetooth (v5.0)ⁱⁱ

Dedicated GPS

Optional: 4G LTE mobile broadband^{vii}

Dual Micro SIM^{vii}

Security Feature

Kensington lock

Optional: Smart card reader

Optional: HF RFID/NFC combo readerⁱ

Power

AC adapter (65W, 100-240VAC, 50/60Hz)

Li-ion battery (3.84V, typical 4990mAh;

min. 4870mAh) x 2

LifeSupport battery swappable technology

Optional: High capacity Li-ion battery

(3.84V, typical 9980mAh; min. 9470mAh) x 2

Dimension (W x D x H) & Weight

275 x 192 x 17.9mm (10.8" x 7.56" x 0.7")

1.04kg (2.29lbs)ⁱⁱⁱ

Rugged Feature

MIL-STD-810H certified

IP66 certified

Vibration & 6 feet (1.8m) drop resistant

Optional: ANSI/UL 121.201, CSA C22.2 NO. 213

(Class I, Division 2, Groups A, B, C, D)

Optional: Salt fog certified

Environmental Specification

Temperature^{iv}:

- Operating: -29°C to 63°C / -20°F to 145°F

- Storage: -51°C to 71°C / -60°F to 160°F

Humidity:

- 95% RH, non-condensing

Pre-installed Software

Getac Camera

Getac Input Method

Getac Driving Safety Utility (trial version)

Getac deployXpress (trial version)

Getac settings and Google applications

(Search, Chrome, Gmail, Maps, YouTube, Play,

Drive, YouTube music, Google TV, Duo and photos)

Getac enrollXpress

Optional software

Getac Driving Safety Utility

Getac deployXpress

Getac OEMConfig

Accessories

Battery (3.84V, typical 4990mAh; min. 4870mAh)

AC adapter (65W, 100-240VAC, 50/60Hz)

Capacitive stylus with tether

Optional:

Carry bag

Battery (3.84V, typical 4990mAh; min. 4870mAh)

High capacity Li-ion battery (3.84V, typical 9980mAh;

min. 9470mAh)

Multi-Bay charger (Dual-Bay)

Multi-Bay charger (Eight-Bay)

AC adapter (65W, 100-240VAC, 50/60Hz)

Office dock AC adapter (65W, 100-240VAC)

DC-DC vehicle adapter (120W, 22-32VDC)

Digitizer pen with tether

Capacitive stylus with tether

Protection film

Hard handle

Hand strap

Shoulder strap (2-point)

Shoulder harness (4-point; handsfree)

Keyboard dock

Vehicle dock^v

Office dock

100W Type-C adapter

Bumper-to-Bumper warranty

Les accidents surviennent quand on s'y attend le moins, en particulier avec les produits renforcés soumis à des conditions difficiles, et peuvent alors engendrer une mise hors service des équipements ainsi que des périodes d'interruption très coûteuses. C'est pourquoi Getac propose de prendre en charge les dommages accidentels dans sa garantie Bumper-to-Bumper, afin de réduire les coûts informatiques de votre entreprise. La garantie Bumper-to-Bumper, c'est la tranquillité d'esprit assurée, avec le meilleur service logistique Pack & Collect d'Europe, puis la réparation et le renvoi rapide par les experts internes de Getac. En quelques jours seulement, vous êtes certain de récupérer vos appareils opérationnels.

Standard

Garantie Bumper-to-Bumper de 3 ans

ZX10 FULLY RUGGED TABLET

- I. 13.56MHz HF RFID/NFC combo reader (ISO 15693, 14443 A/B, Mifare and FeliCa™ compliant).
- II. Bluetooth performance and connectable distance may be subject to interference with the environments and performance on client devices, users may be able to reduce effects of interference by minimizing the number of active Bluetooth wireless devices that is operating in the area.
- III. Weight and dimensions vary from configurations and optional accessories; optional high-capacity batteries add approx. 7.65mm (H), 144g.
- IV. Tested by an independent third-party test lab following MIL-STD-810H.
- V. Gamber Johnson and Havis vehicle docks are e-mark certified.
- VI. Android enterprise recommended rugged devices deliver a consistent set of features verified by Google with an elevated device baseline, increased security standards and enterprise-focused features and behaviors to meet the needs of users. Google and Android are trademarks of Google LLC.
- VII. Units with 4G LTE option come with two embedded SIM card slots.

Information provided herewith is for reference only, available specification shall be subjected to quotation by request.

	Office Dock (Pogo)	Vehicle Dock(Havis, Gamber-Johnson)	Vehicle Dock(RAM Mounts)
Serial Port	-	-	-
Microphone	1	1	-
Audio Output	1	1	-
DC in Jack	1	1	1
USB	USB 2.0 x 3	USB 2.0 x 2	USB 2.0 x 1 or USB 2.0 x 2
LAN	1	-	-
HDMI	1	-	-
RF Pass-through	-	3 (WWAN, WLAN, GPS)	-
Kensington Lock	-	-	-

Getac

GETAC TECHNOLOGY CORPORATION

12, avenue du Québec Bâtiment Goyave 91140

Villebon sur Yvette Tel: +33 160 12 80 60

Sales-Getac-France@getac.com |

www.getac.com/fr/

Copyright © 2023 Getac Technology Corporation and/or any of its affiliates. All Rights Reserved. Les informations sont fournies ici pour référence seulement, les spécifications disponibles doivent faire l'objet d'un devis sur demande.